



Model 6053
Shown in White
with EverBrass (PVD) trim

FEATURES

- 32" x 59-3/4" x 19-1/4" Rectangular whirlpool
- Simple air-switch operation
- 1-1/4 HP single-speed pump
- Six powerful Ultra-Swirl jets
- Two air controls
- Optional removable apron
- Color-Match trim, metal upgrades available (Consult Price Book for specific colors)
- Available in White and Standard Colors (Consult Price Book for specific colors)
- Outstanding protection - Mansfield® Limited One Year Acrylic Warranty

Model No.	Description	Approx.Wt.
6053	32" x 59-3/4" x 19-1/4" Rectangular whirlpool. Specify color and options when ordering.	94 lbs. (43 kg)
6553	32" x 59-3/4" x 19-1/4" Rectangular bath. Specify color and options when ordering.	74 lbs. (34 kg)
PF1325	Five foot apron	15 lbs. (6.7 kg)
SWP150	Factory installed nailing flange	2 lbs. (.9 kg)
SWAPOO	Nailing flange kit	2 lbs. (.9 kg)
SWP151	Factory installed In-Line heater	3 lbs. (1.3 kg)
PF1320	Chrome lift and turn drain kit	1 lbs. (.4 kg)
PF1321	Everbrass lift and turn drain kit	1 lbs. (.4 kg)
PF1335	Chrome trim upgrade	1 lbs. (.4 kg)
PF1336	Everbrass trim upgrade	1 lbs. (.4 kg)



For more information or to order, call 800-325-4422.
www.whirlpoolbathtubs.com

3260 ALTO

Rectangular Whirlpool or Bath

PRO-FIT[®]

UPGRADES

Removable Apron - 5 ft. Model

- This upgrade provides quick and easy access through removable apron to whirlpool pump and interior parts.



Factory Installed Nailing Flange

- Code approved, nailing flange option makes watertight installation easy and secure.



Nailing Flange Kit

- Code approved kit featuring flange material, sticky tape and instructions.
- Makes watertight installation easy and secure.



Factory Installed In-line Heater

- A reliable, heating control upgrade maintains water temperature at desired level and operates when flow of water is detected in the system. Features a standard plug for easy electrical connection (GFCI: 120V, 20 amp dedicated circuit required to power this heater).



Lift & Turn Drain Kit Chrome and Everbrass (PVD)


- The lift and turn drain kit provides simple and easy draining of the bathtub.



Trim Upgrade

- This option allows an upgrade to Chrome or Everbrass (PVD) trim including jets, intake, control and air control(s).

TECHNICAL INFORMATION

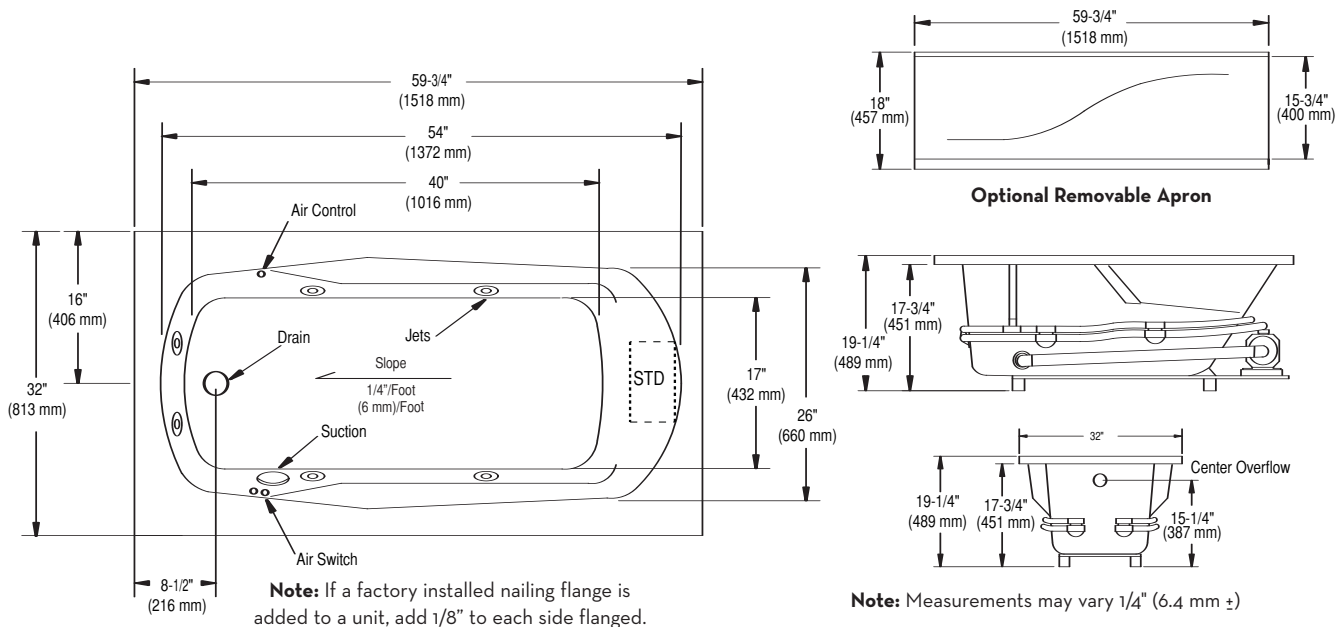

SPECIFICATIONS

Dimensions	32" x 59-3/4" x 19-1/4"	Number of Jets	Six
Material	Acrylic, fiberglass reinforced	Air Volume Control	Two
Construction	Self-contained, pre-plumbed whirlpool bath	Water Capacity	42 gal. max., 27 gal. min. (160 liters/103 liters)
Pump Motor	1-1/4 HP, 1 phase, 120 volt, 60 HZ, 5.9 AMP,	Floor Loading	47 lbs./sq. ft. (229 kg/m ²)
Electrical Requirements	120 volt, 20 AMP, GFCI	Shipping Weight	134 lbs. (61 kg)
		Warranty	Limited One Year

These dimensions are nominal and are subject to change without notice. When tested for compliance to the requirement of ANSI A112.19.7M and A112.19.8M for "Whirlpool Bath Appliances" and ANSI Z124 for "Plastic Bathtub Units" the tested units are found to comply and are acceptable for listing under the Terralab Engineers, Inc. follow-up service. Listed Number 15197. Certified for permanent electrical supply connection only.

Mansfield[®]
performance for a lifetime[™]