



PRO-FIT[®]

4268 OV ED

Oval Whirlpool or Bath

whirlpoolbathtubs.com



Model 6028E
Shown in White
with EverBrass (PVD) trim

FEATURES

- 42" x 68" x 20" Oval whirlpool
- Simple air-switch operation
- 1-1/4 HP single-speed pump
- Six powerful Ultra-Swirl jets
- Two air controls
- Drop-in installation
- Color-Match trim, metal upgrades available (Consult Price Book for specific colors)
- Available in White and Standard Colors (Consult Price Book for specific colors)
- Outstanding protection - Mansfield[®] Limited One Year Acrylic Warranty

Model No.	Description	Approx.Wt.
6028E	42" x 68" x 20" Oval end drain whirlpool. Specify color and options when ordering.	118 lbs. (54 kg)
6528E	42" x 68" x 20" Oval end drain bath. Specify color and options when ordering.	98 lbs. (44 kg)
SWP151	Factory installed In-Line heater	3 lbs. (1.3 kg)
PF1320	Chrome lift and turn drain kit	1 lbs. (.4 kg)
PF1321	Everbrass lift and turn drain kit	1 lbs. (.4 kg)
PF1335	Chrome trim upgrade	1 lbs. (.4 kg)
PF1336	Everbrass trim upgrade	1 lbs. (.4 kg)



For more information or to order, call 800-325-4422.
www.whirlpoolbathtubs.com

4268 OVED

Oval Whirlpool or Bath

PRO-FIT®

UPGRADES

Factory Installed In-line Heater

- A reliable, heating control upgrade maintains water temperature at desired level and operates when flow of water is detected in the system. Features a standard plug for easy electrical connection (GFCI: 120V, 20 amp dedicated circuit required to power this heater).



Trim Upgrade


- This option allows an upgrade to Chrome or Everbrass (PVD) trim including jets, intake, control and air control(s).

Lift & Turn Drain Kit Chrome and Everbrass (PVD)

- The lift and turn drain kit provides simple and easy draining of the bathtub.



TECHNICAL INFORMATION

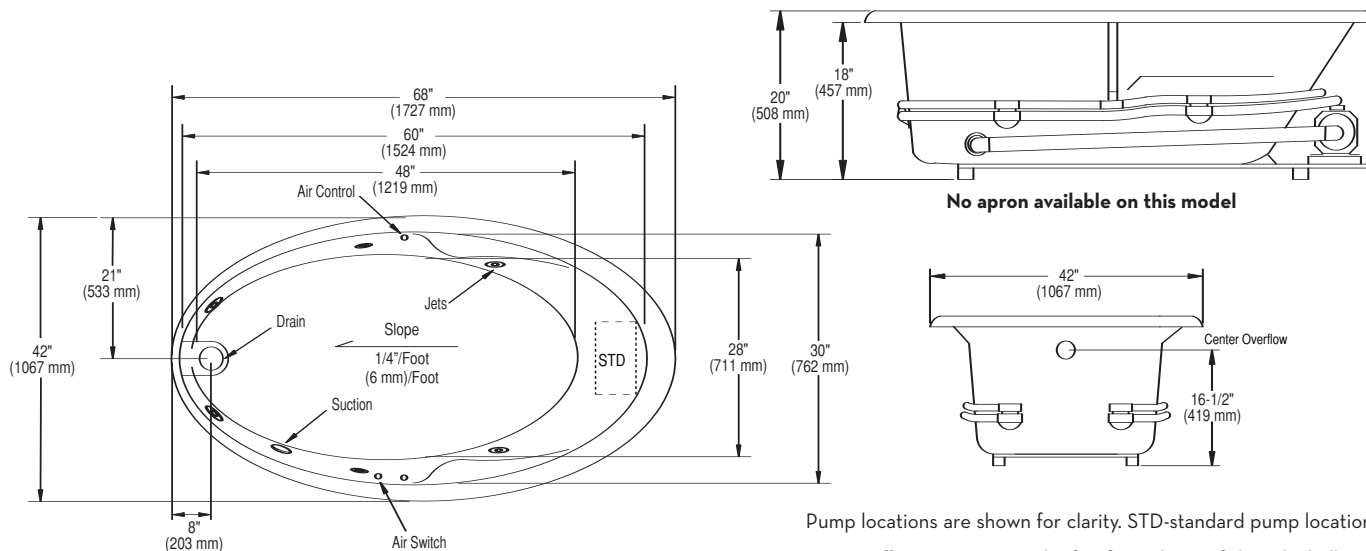

Installer Note: Due to the freeform shape of the tub shell, it is recommended that the tub be on the job before making the final cut-out for drop-in installation.

Note: Measurements may vary 1/4" (6.4 mm ±)

SPECIFICATIONS

Dimensions	42" x 68" x 20"	Number of Jets	Six
Material	Acrylic, fiberglass reinforced	Air Volume Control	Two
Construction	Self-contained, pre-plumbed whirlpool bath	Water Capacity	74 gal. max., 59 gal. min. (281 liters/224 liters)
Pump Motor	1-1/4 HP, 1 phase, 120 volt, 60 HZ, 5.9 AMP,	Floor Loading	47 lbs./sq. ft. (229 kg/m ²)
Electrical Requirements	120 volt, 20 AMP, GFCI	Shipping Weight	158 lbs. (72 kg)
		Warranty	Limited One Year

These dimensions are nominal and are subject to change without notice.

When tested for compliance to the requirement of ANSI A112.19.7M and A112.19.8M for "Whirlpool Bath Appliances" and ANSI Z124 for "Plastic Bathtub Units" the tested units are found to comply and are acceptable for listing under the Terralab Engineers, Inc. follow-up service. Listed Number 15197.

Certified for permanent electrical supply connection only.

Mansfield®
performance for a lifetime™