



Model 6039  
Shown in White  
with EverBrass (PVD) Trim

**FEATURES**

- 59-3/4" x 59-3/4" x 21-1/4" Corner whirlpool
- Simple air-switch operation
- 1-1/4 HP single-speed pump
- Six powerful Ultra-Swirl jets
- Two air controls
- Optional removable corner apron
- Color-Match trim, metal upgrades available (Consult Price Book for specific colors)
- Available in White and Standard Colors (Consult Price Book for specific colors)
- Outstanding protection - Mansfield® Limited One Year Acrylic Warranty



Optional Removable Corner Apron

Model No.	Description	Approx.Wt.
6039	59-3/4" x 59-3/4" x 21-1/4" Corner whirlpool. Specify color and options when ordering.	127 lbs. (58 kg)
6539	59-3/4" x 59-3/4" x 21-1/4" Corner bath. Specify color and options when ordering.	107 lbs. (49 kg)
PF1327	Corner apron	20 lbs. (9 kg)
SWP150	Factory installed nailing flange	2 lbs. (.9 kg)
SWAP00	Nailing flange kit	2 lbs. (.9 kg)
SWP151	Factory installed In-Line heater	3 lbs. (1.3 kg)
PF1320	Chrome lift and turn drain kit	1 lbs. (.4 kg)
PF1321	Everbrass lift and turn drain kit	1 lbs. (.4 kg)
PF1335	Chrome trim upgrade	1 lbs. (.4 kg)
PF1336	Everbrass trim upgrade	1 lbs. (.4 kg)



**For more information or to order, call 800-325-4422.**  
**www.whirlpoolbathtubs.com**

UPGRADES

**Factory Installed Nailing Flange**

- Code approved nailing flange option makes watertight installation easy and secure.



**Factory Installed In-line Heater**

- A reliable, heating control upgrade maintains water temperature at desired level and operates when flow of water is detected in the system.



**Nailing Flange Kit**

- Code approved kit featuring flange material, sticky tape and instructions.
- Makes watertight installation easy and secure.



**Lift & Turn Drain Kit Chrome and Everbrass (PVD)**

- The lift and turn drain kit provides simple and easy draining of the bathtub.



**Trim Upgrade**



- This option allows an upgrade to Chrome or Everbrass (PVD) trim including jets, intake, control and air controls.

**Removable Apron - Corner Model**


- This upgrade provides quick and easy access through removable apron to whirlpool pump and interior parts. Available on selected models, check specific model upgrade listing.



TECHNICAL INFORMATION

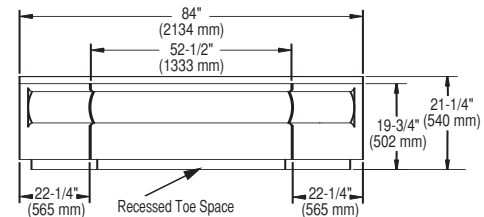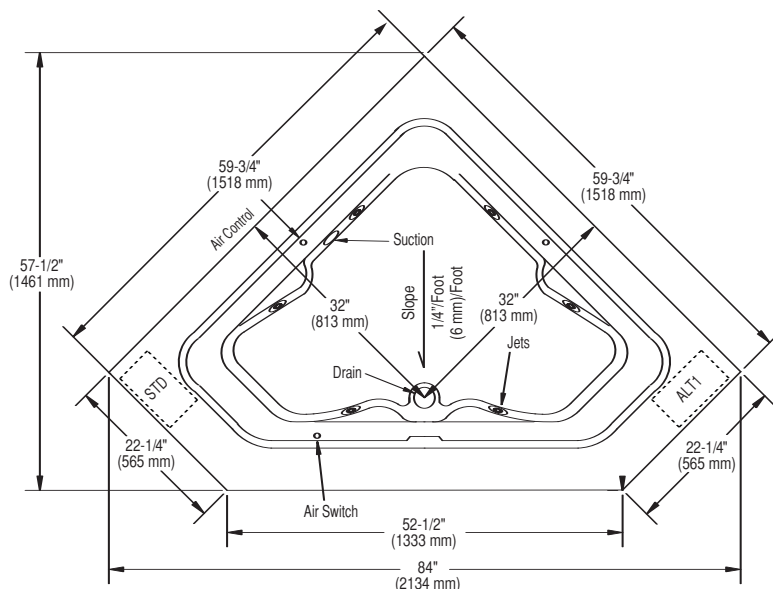

**Optional Removable Apron**

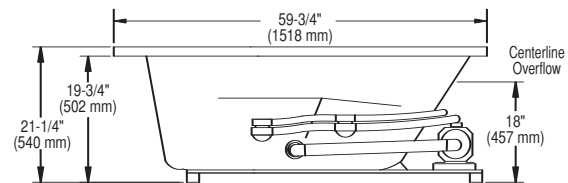

Pump locations are shown for clarity. STD-standard pump location. ALT1-alternate pump location.

**Note:** If a factory installed nailing flange is added to a unit, add 1/8" to each side flanged.

**Note:** Measurements may vary 1/4" (6.4 mm ±)

SPECIFICATIONS

<b>Dimensions</b>	59-3/4" x 59-3/4" x 21-1/4"
<b>Material</b>	Acrylic, fiberglass reinforced
<b>Construction</b>	Self-contained, pre-plumbed whirlpool bath, mounted on a pre-leveled thermoformed base
<b>Pump Motor</b>	1-1/4 HP, 1 phase, 120 volt, 60 HZ, factory installed
<b>Electrical Requirements</b>	120 volt, 20 AMP, GFCI
<b>Inline Heater</b>	1.5 KW, 12.5 AMP, 110 volt

<b>Number of Jets</b>	Six
<b>Air Volume Control</b>	Two
<b>Water Capacity</b>	85 gal. max., 60 gal. min. (323 liters/228 liters)
<b>Floor Loading</b>	47 lbs./sq. ft. (229 kg/m <sup>2</sup> )
<b>Shipping Weight</b>	167 lbs. (76 kg)
<b>Warranty</b>	Limited One Year

These dimensions are nominal and are subject to change without notice. When tested for compliance to the requirement of ANSI A112.19.7M and A112.19.8M for "Whirlpool Bath Appliances" and ANSI Z124 for "Plastic Bathtub Units" the tested units are found to comply and are acceptable for listing under the Terralab Engineers, Inc. follow-up service. Listed Number 15197. Certified for permanent electrical supply connection only.

