



Model 5061 Shown in White with Everbrass (PVD) Trim and optional integral fill spout

**FEATURES**

- 60" x 60" x 22" Corner whirlpool
- Two-person design with seating area
- Hydro-V™ back jet system: Six jets at each end, massage the shoulder blades, upper and middle back muscles and the bottom two spinning jets for your lower back
- Swirl-way® DryJets are adjustable in both direction and flow creating a broad, circular pattern of water and warm air for a deep venturi therapeutic massage
- Available with or without Integral fill spout
- Cable operated drain in Color-Match, Chrome, Everbrass (PVD) or Brushed Nickel
- Powerful 2 HP pump system creates an invigorating whirlpool action
- Dual air controls for the ultimate jet power control
- Two "Jellybean" pillows in your choice of White, Bone or Biscuit
- Trim finish in your choice of Color-Match, Chrome, Everbrass (PVD) and Brushed Nickel
- Outstanding Protection - Mansfield® Limited Ten Year Warranty
- Available in White, Standard, Premium and Designer Colors (Consult Price Book for specific colors)

The Covington C features a large bathing well and the Hydro-V™ back jet system at each end. Four Swirl-way® DryJets provide the body massage. Integral fill spout rolls down the optional seat providing sensory appeal for body and mind.

Model No.	Description	Approx.Wt.
5061	60" x 60" x 22" Corner whirlpool w/spout. Specify color and options when ordering.	130 lbs. (59 kg)
5062	60" x 60" x 22" Corner whirlpool w/o spout. Specify color and options when ordering.	120 lbs. (54 kg)
5561	60" x 60" x 22" Corner bath w/spout. Specify color and options when ordering.	110 lbs. (50 kg)
5562	60" x 60" x 22" Corner bath w/o spout. Specify color and options when ordering.	100 lbs. (45 kg)

- 5061LUX Luxury package
- 5062LUX Same as above w/o spout
- 5061BAS Basic package
- 5062BAS Same as above w/o spout
- SWAPO5 Nailing Flange Kit
- SPA150 Factory installed nailing flange



For more information or to order, call 800-325-4422.  
www.whirlpoolbathtubs.com

4 lbs.  
2 lbs. (1 kg)

# COVINGTON C Corner Whirlpool or Bath



## FEATURES & UPGRADES


### Basic Package

- SimpleTouch™ 3 button control
- 2 HP 10-speed pump
- Pillows
- Color-Match trim



### Luxury Package



- SensaSelect™ 5 button control
- 2 HP 10-speed pump
- Remote control
- Pillows
- Infusion™ 2 Chromatherapy system
- In-Line heater
- Metal trim upgrade



### Basic Options

- Infusion™ 2 Chromatherapy system
- 1500 watt in-line water heater
- Metal trim upgrade
- Cable drain in CM, CH, EB & BN
- Nailing flange kit
- Factory installed nailing flange

## TECHNICAL INFORMATION

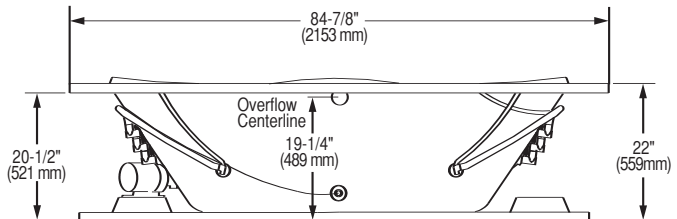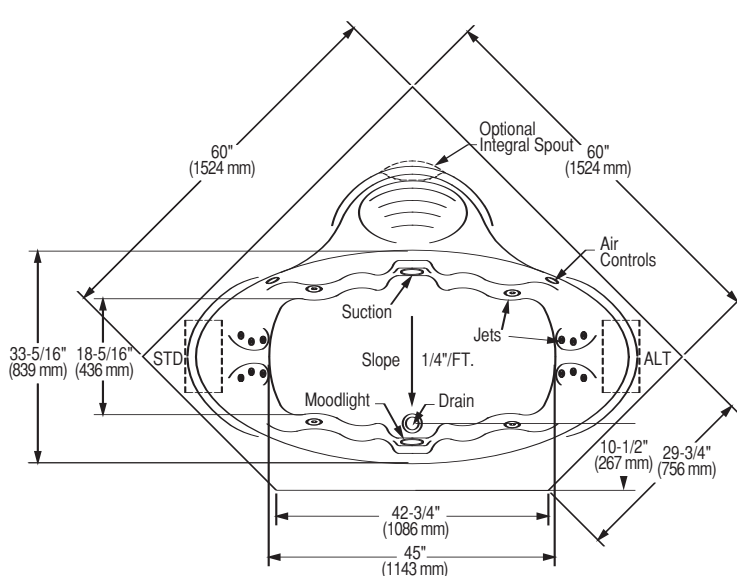

**No apron available on this model**

Pump locations are shown for clarity. STD-standard pump location. ALT1-alternate pump location.

**Note:** Install this product according to the installation guide. Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2

## SPECIFICATIONS

<b>Dimensions</b>	60" x 60" x 22"
<b>Material</b>	Acrylic, fiberglass reinforced
<b>Construction</b>	Self-contained, pre-plumbed whirlpool bath with heat-bent rigid PVC pipe, mounted on a pre-leveled thermoformed, drip pan base
<b>Pump Motor</b>	2 HP, Ten speed, 120 volt, 60 HZ, 13.5 AMP
<b>Electrical Requirements</b>	Luxury: Two separate 120 volt, 20 AMP, GFCI protected circuits Basic: One separate, 120 volt, 20 AMP, GFCI outlet

<b>Number of Jets</b>	Sixteen
<b>Air Volume Control</b>	Two
<b>Water Capacity</b>	70 gal. max., 55 gal. min. (265 liters/208 liters)
<b>Floor Loading</b>	47 lbs./sq. ft. (229 kg/m <sup>2</sup> )
<b>Shipping Weight</b>	175 lbs. (79 kg)
<b>Warranty</b>	Limited Ten Year

These dimensions are nominal and are subject to change without notice. When tested for compliance to the requirement of ANSI A112.19.7M and A112.19.8M for "Whirlpool Bath Appliances" and ANSI Z124 for "Plastic Bathtub Units" the tested units are found to comply and are acceptable for listing under the Terralab Engineers, Inc. follow-up service. Listed Number 15197. Certified for permanent electrical supply connection only.

