



Model 5009
Shown in White
with Brushed
Nickel Trim

FEATURES

- 60" x 60" x 21-1/4" Corner whirlpool
- Powerful 2 HP pump creates an invigorating Whirlpool Action
- Swirl-way® DryJets are adjustable in both direction and flow creating a broad, circular pattern of water and warm air for a deep venturi therapeutic massage
- Dual air controls for the ultimate jet power control
- Two "Jellybean" pillows in your choice of White, Bone or Biscuit
- Trim finish in your choice of Color-Match, Chrome, Everbrass (PVD) or Brushed Nickel
- Outstanding Protection - Mansfield® Limited Ten Year Warranty
- Available in White, Standard, Premium and Designer Colors (Consult Price Book for Specific Colors)

The spacious oval bathing well of the Davanti is enhanced by an above-the-water, contoured seating area. Dual armrests provide a choice of seating and six powerful body DryJets provide a soothing whirlpool sensation. The delicately smooth curves of the Davanti's optional apron gives the final touch to the bath suite of your dreams.

Model No.	Description	Approx.Wt.
5009	60" x 60" x 21-1/4" Corner whirlpool. Specify color and options when ordering.	125 lbs. (56 kg)
5509	60" x 60" x 21-1/4" Corner bath. Specify color and options when ordering.	105 lbs. (47 kg)
5009LUX	Luxury package	
5009BAS	Basic package	
SWAPO5	Nailing Flange Kit	4 lbs. (2 kg)
SPA150	Factory installed nailing flange	2 lbs. (1 kg)
SW136	Removable three-sided apron	18 lbs. (8.1 kg)



For more information or to order, call 800-325-4422.
www.whirlpoolbathtubs.com

DAVANTI

Corner Whirlpool or Bath



FEATURES & UPGRADES


Basic Package

- SimpleTouch™ 3 button control
- 2 HP single speed pump
- Pillows
- Color-Match trim



Luxury Package



- SensaSelect™ 5 button control
- 2 HP 10-speed pump
- Remote control
- Pillows
- Infusion™ 2 Chromatherapy system
- In-Line heater
- Metal trim upgrade




Basic Options

- Infusion™ 2 Chromatherapy system
- 1500 watt in-line water heater
- Metal trim upgrade
- Cable drain in CM, CH, EB & BN
- Nailing flange kit
- Factory installed nailing flange
- Removable three-sided apron

TECHNICAL INFORMATION

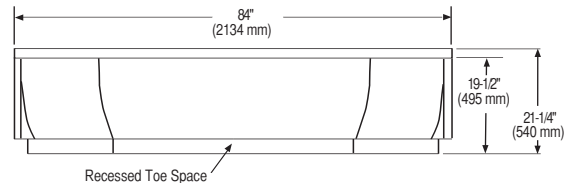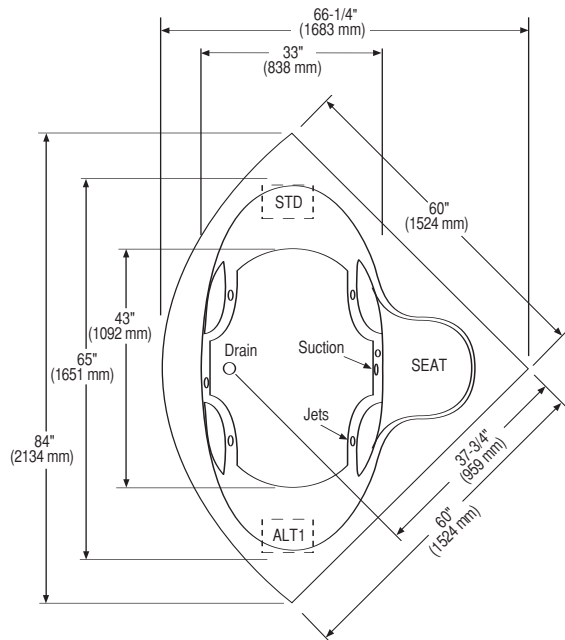

If a factory installed nailing flange is added to a unit, add 1/8" (3 mm) to each side flanged. Unit is available with optional removable apron for access to pump/motor and plumbing on whirlpool baths.

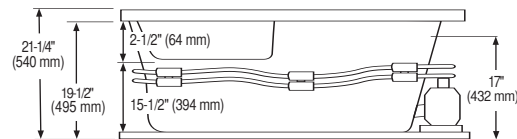

Pump locations are shown for clarity. STD-standard pump location. ALT1-alternate pump location.

Note: Rough-in measurements may vary 1/4" (6.4 mm ±).

SPECIFICATIONS

Dimensions	60" x 60" x 21-1/4"
Material	Acrylic, fiberglass reinforced
Construction	Self-contained, pre-plumbed whirlpool bath with heat-bent rigid PVC pipe, mounted on a pre-leveled thermoformed, drip pan base
Pump Motor	2 HP, Ten speed, 120 volt, 60 HZ
Electrical Requirements	Luxury: Two separate 120 volt, 20 AMP, GFCI protected circuits Basic: One separate, 120 volt, 20 AMP, GFCI outlet

Number of Jets	Six
Air Volume Control	Two
Water Capacity	75 gal. max., 45 gal. min. (285 liters/171 liters)
Floor Loading	47 lbs./sq. ft. (229 kg/m ²)
Shipping Weight	170 lbs. (77 kg)
Warranty	Limited Ten Year

These dimensions are nominal and are subject to change without notice.
When tested for compliance to the requirement of ANSI A112.19.7M and A112.19.8M for "Whirlpool Bath Appliances" and ANSI Z124 for "Plastic Bathtub Units" the tested units are found to comply and are acceptable for listing under the Terralab Engineers, Inc. follow-up service. Listed Number 15197.
Certified for permanent electrical supply connection only.

