

# PRO-FIT®

6060 DL

Corner Whirlpool or Bath



### **Features**

- 60" x 60" x 20" Corner whirlpool or bathtub
- Side-by-side seating for two
- Convenient air-button operation
- Variable-speed pump
- Six powerful Ultra-Swirl jets
- · Two air controls
- IAPMO, CSA, and UL listed
- Available in Standard Colors (Consult Price Book for specific colors)
- Complete with Color Matched Trim (Consult Price Book for specific colors)
- Outstanding protection Mansfield® Limited One Year Acrylic Warranty

Model No.	Description	Approx. Wt.
6041	60" x 60" x 20" Corner whirlpool. Specify color and options when ordering.	110 lbs. (50 kg)
6541	60" x 60" x 20" Corner bath. Specify color and options when ordering.	90 lbs. (41 kg)
SWP150 SWAP00	Factory installed nailing flange Nailing flange kit	2 lbs. (.9 kg) 2 lbs. (.9 kg)
SWP151	Factory installed In-line heater	3 lbs. (1.4 kg)
PF1320	Chrome lift and turn drain kit	1 lbs. (.4 kg)
PF1321	Everbrass lift and turn drain kit	1 lbs. (.4 kg)
PF1322	Brushed nickel lift and turn drain kit	1 lbs. (.4 kg)
PF1323	Oil Rubbed Bronze lift and turn drain kit	1 lbs. (.4 kg)
PF1335	Chrome trim upgrade	1 lbs. (.4 kg)
PF1336	Everbrass trim upgrade	1 lbs. (.4 kg)
PF1337	Brushed nickel trim upgrade	1 lbs. (.4 kg)
PF1338	Oil Rubbed Bronze trim upgrade	1 lbs.(.4 kg)g)



## 6060 DL

## Corner Whirlpool or Bath

## PRO-FIT®

## **Upgrades**

#### **Factory Installed Nailing Flange**

Code approved, nailing flange option makes watertight installation easy and secure.



#### Nailing Flange Kit

- · Code approved kit featuring flange material, sticky tape and instructions.
- Makes watertight installation easy and secure.



#### Lift & Turn Drain Kit Chrome, Everbrass (PVD), Brushed Nickel and Oil Rubbed Bronze

A reliable, heating control upgrade maintains

water temperature at desired level and operates when flow of water is detected in the system. Features a standard plug for

Factory Installed In-line Heater

required to power this heater).

The lift and turn drain kit provides simple and easy draining of the bathtub.






#### Trim Upgrade

• This option allows an upgrade to Chrome, Everbrass (PVD), Brushed Nickel and Oil Rubbed Bronze trim including jets, intake, control and air controls.

#### Technical Information

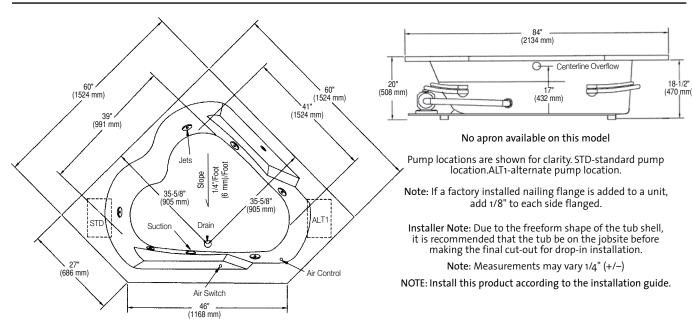

## Specifications

Dimensions	60" x 60" x 20"	Number of Jets	Six
Material	Acrylic, fiberglass reinforced	Air Volume Control	Two
Construction	Self-contained, pre-plumbed whirlpool bath	Water Capacity	70 gal. max., 42 gal. min.
Pump Motor	Single speed, 120 volt, 60 HZ, 5.5-5.9 amps,		(265 liters/159 liters)
	single phase premounted	Floor Loading	47 lbs./sq. ft. (229 kg/m²)
Electrical Requirements	120 volt, 20 AMP, GFCI	Shipping Weight (whirlpool)	146 lbs. (66 kg)
		Shipping Weight (bathtub)	126 lbs. (57 kg)
		Warranty	Limited One Year

These dimensions are nominal and subject to change without notice.

When tested for compliance to the requirements of ANSI A112.19.7M for "Whirlpool Bath Appliances" and ANSI Z124.1.2M "American National Standard for Plastic Bathtub and Shower Units", the tested units are found to comply and are acceptable for listing under IAPMO R  $\&\,\text{T.}$ 

Certified for permanent electrical connection only.

