


SPECIFICATIONS

BY535, BY630, BY635 (Brittany™)

Whirlpool Bath

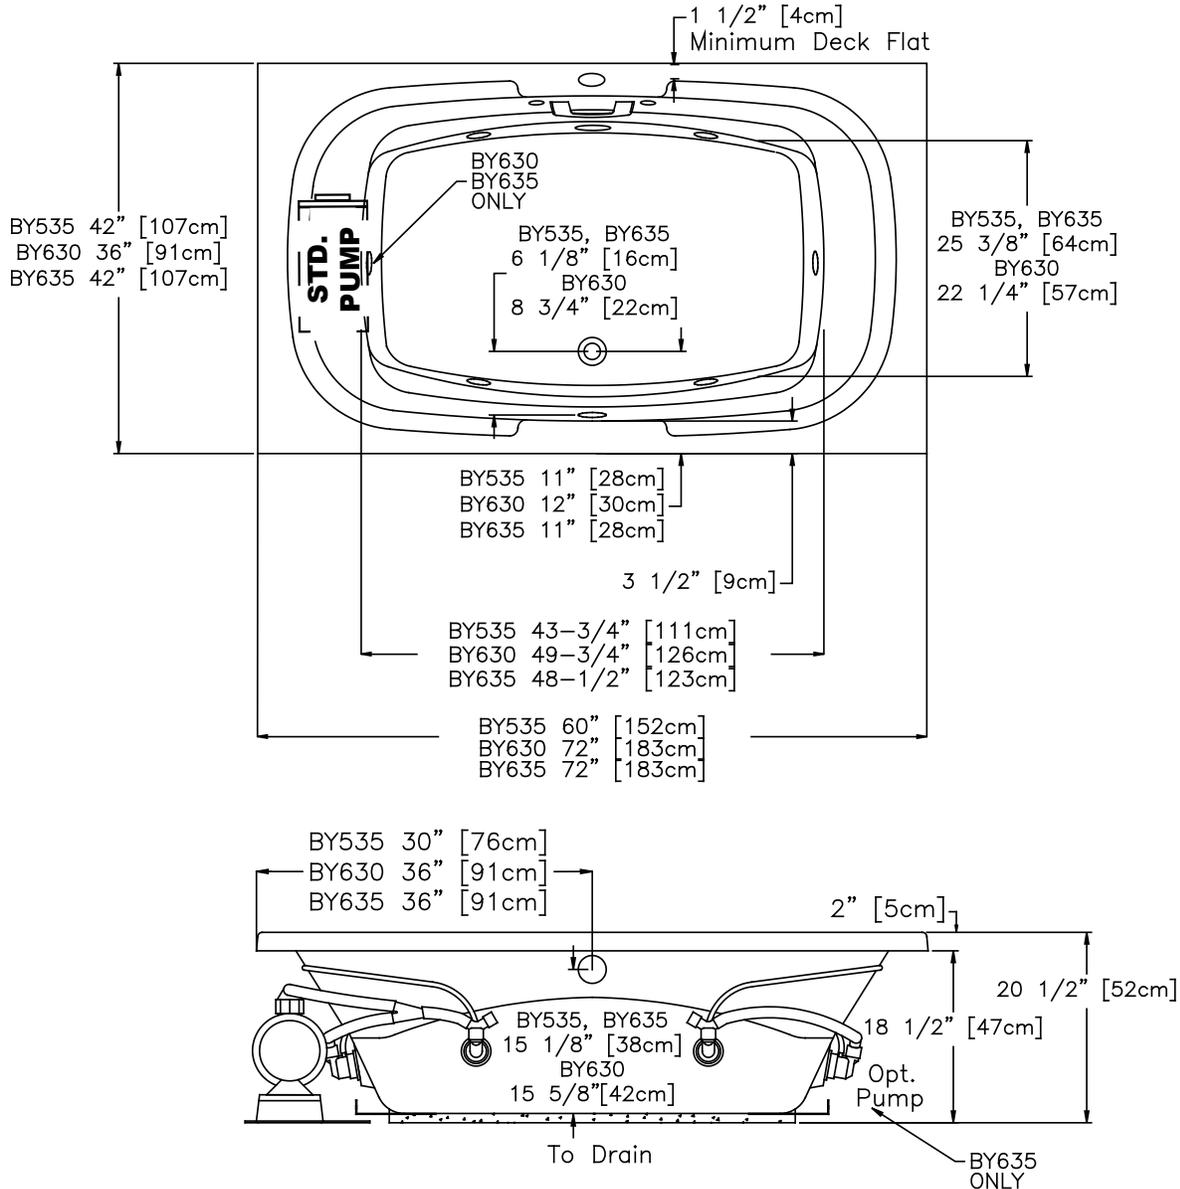

Patents received or pending.

Note: Dimensional Tolerances: ±1/4"

	BY535	BY630	BY635
Drop-in-Hole Size:	58" x 40"	70" x 34"	70" x 40"
Operating Capacity:	52 gal	45 gal	58 gal
Overflow Capacity:	73 gal	62 gal	80 gal
Floor Loading / sq.ft.:	50.3 lbs	45.5 lbs	45.4 lbs
Cartoned Wt: Whirlpool	121 lbs	130 lbs	130 lbs
Cartoned Wt: Soaker	81 lbs	108 lbs	90 lb
Cube:	36.2 cu. ft.	41.5 cu. ft.	43.2 cu. ft.

Construction: Fiberglass reinforced acrylic bath with Level Form™ full-support base

We provide products listed with Underwriters Laboratories, Inc. (UL), International Association of Plumbing and Mechanical Officials (IAPMO), and Canadian Underwriters Laboratory (CUL). Consult factory with your listing requirements.

Standard		1 1/2 hp, 1 speed pump, touch control with low water level sensor, and a 20-minute timer. Light indicates when pump is on. Requires one (1) 120V 20A dedicated GFCI-protected circuits.
Signature		1 1/2 hp, 3 speed pump, digital control with low water level sensor, water temperature sensor, 20-minute timer, automatic 1.5 kW heater, and a front access LED moodlight. Shows water temperature and time remaining. Floating Universal Remote Control operates all bath and light functions plus TV, VCR, CD, etc. Requires two (2) 120V 20A dedicated GFCI-protected circuits.