


SPECIFICATIONS EM530, EM553 & EM630 Whirlpool Bath



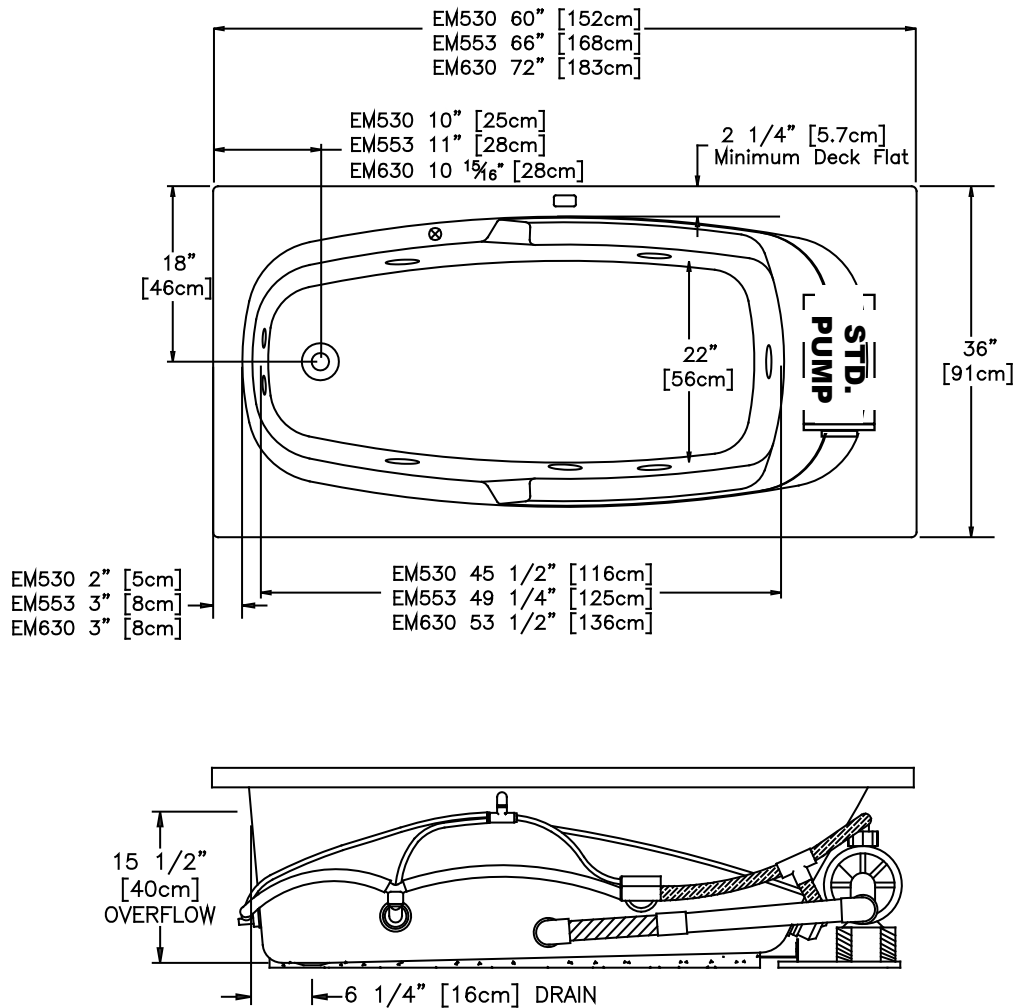

Note: Dimensional Tolerances $\pm 1/4$

	EM530	EM553	EM630
Drop-in-Hole Size:	58" x 34"	64" x 34"	70" x 34"
Operating Capacity:	37 gal	39 gal	45 gal
Overflow Capacity:	56 gal	61 gal	69 gal
Floor Loading / sq.ft.:	46.6 lbs	44.2 lbs	44.1 lbs
Cartoned Wt:	101 lbs	108 lbs	118 lbs
Cube:	31.3 cu. ft.	34.3 cu. ft.	37.3 cu. ft.

Construction: Fiberglass reinforced acrylic bath with Level Form™ full-support base

We provide products listed with Underwriters Laboratories, Inc. (UL), International Association of Plumbing and Mechanical Officials (IAPMO), and Canadian Underwriters Laboratory (CUL). Consult factory with your listing requirements.

Standard	 <p>1 1/2 hp, 1 speed pump, touch control with low water level sensor, and a 20-minute timer. Light indicates when pump is on. Requires one (1) 120V 20A dedicated GFCI-protected circuits.</p>
Signature	 <p>1 1/2 hp, 3 speed pump, digital control with low water level sensor, water temperature sensor, 20-minute timer, automatic 1.5 kW heater, and a front access LED moodlight. Shows water temperature and time remaining. Floating Universal Remote Control operates all bath and light functions plus TV, VCR, CD, etc. Requires two (2) 120V 20A dedicated GFCI-protected circuits.</p>