


## SPECIFICATIONS EM535 & EM635 Whirlpool & Soaking Baths



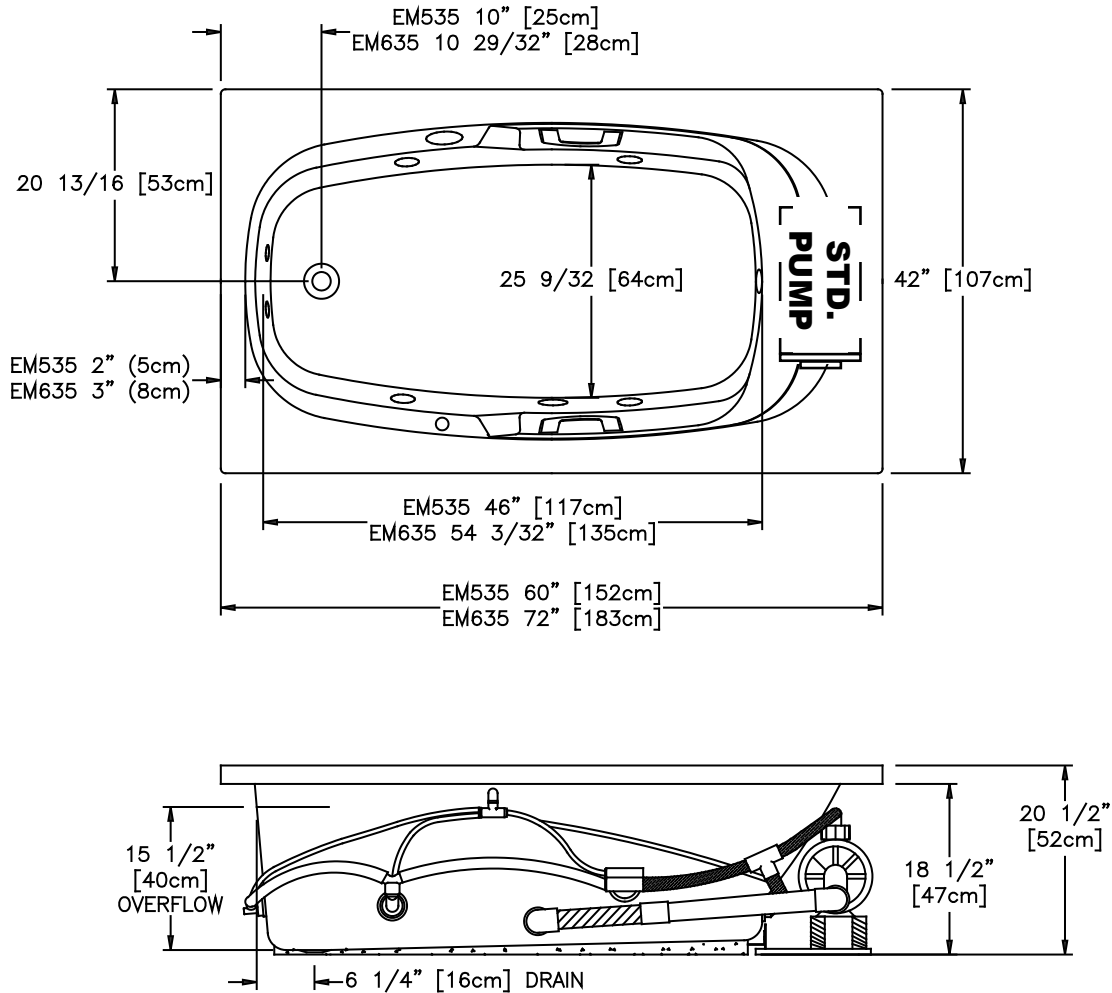

Note: Dimensional Tolerances  $\pm 1/4$

	<b>EM535</b>	<b>EM635</b>
Drop-in-Hole Size:	58" x 40"	70" x 40"
Operating Capacity:	44 gal	49 gal
Overflow Capacity:	65 gal	77 gal
Floor Loading / sq.ft.:	44.7 lbs	40.5 lbs
Cartoned Wt: Whirlpool	109 lbs	122 lbs
Cartoned Wt: Soaker	74 lbs	82 lbs
Cube:	36.2 cu. ft.	43.2 cu. ft.

**Construction:** Fiberglass reinforced acrylic bath with Level Form™ full-support base

We provide products listed with Underwriters Laboratories, Inc. (UL), International Association of Plumbing and Mechanical Officials (IAPMO), and Canadian Underwriters Laboratory (CUL). Consult factory with your listing requirements.

<b>Standard</b>	 <p>1 1/2 hp, 1 speed pump, touch control with low water level sensor, and a 20-minute timer. Light indicates when pump is on. Requires one (1) 120V 20A dedicated GFCI-protected circuits.</p>
<b>Signature</b>	 <p>1 1/2 hp, 3 speed pump, digital control with low water level sensor, water temperature sensor, 20-minute timer, automatic 1.5 kW heater, and a front access LED moodlight. Shows water temperature and time remaining. Floating Universal Remote Control operates all bath and light functions plus TV, VCR, CD, etc. Requires two (2) 120V 20A dedicated GFCI-protected circuits.</p>